


PRODUCT NUMBER: DESCRIPTION:		SFS80X	
		Halogen and LED roadway arrowboard.	
		anowi	odiu.
CREATED:	11/01/2019	Par:	J-A Roche
REVISED:		Par:	
COMMENT:			

TECHNICAL SPECIFICATION

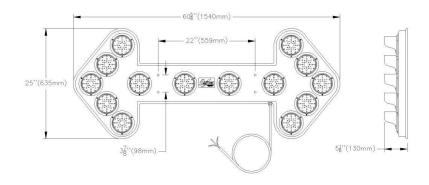

ELECTRICAL

14 sealed lamps, 4" diameter

SFS80 Halogen 11 W per lamp (1A)
 SFS80L2 20 LED per lamp (0.2A)
 SFS80L4 40 LED per lamp (0.4A)
 SFS80L6 60 LED per lamp (0.6A)

- 12VDC supply by default
- Automatic intensity adjustment, with a photocell integrated to the arrowboard body
- Rear facing indicator lamp Ø19mm (3/4") included

MECHANICAL

- Body made of moulded UV resistant ABS, black with haircell finish, 7/32" thick
- Includes 180°sun visors on each lamp
- 4 reinforced mounting holes Ø=7/16" and drain holes at each tip
- Square insertion holes for a motorized support
- Watertight strain relief on the control cable
- Approximate weight: 18lbs (8kg)

CABLES

• Choose your length, 7 conductors 18awg, 6m standard

SCC8006	6 metre	SCC8011	11 metre
SCC8008	8 metre	SCC8012	12 metre
SCC8009	9 metre	SCC8015	15 metre
SCC8010	10 metre		

MOTORIZED SUPPORT

- Choose from our selection
 - o SBM10, rugged
 - o SBM20, low profile

REPLACEMENT PARTS

•	180 degree visor	PF3004	 Lamp, 20 LED 	SLL4124
•	Arrow body	PF3010	 Lamp, 40 LED 	SLL4144
•	Custom length control cable	SCC80XX	 Lamp, 60 LED 	SLL4164

• Lamp, 11W halogen PL9005




	PRODUCT NUMBER:		SFS80X	
DESCRIPTION:		Halogen and LED roadway		
		arrowboard.		
	CREATED:	11/01/2019	Par:	J-A Roche
	REVISED:		Par:	
	COMMENT:			

TECHNICAL SPECIFICATION

CABLING CONNECTIONS

For a 14 lamp arrowboard, halogen or LED: the control cable has 7 conductors, 18awg, in a 6m length standard.



Lamp	Wire colour	Controller terminal (*)
Common (+12V)	White	1
5	Blue	5
6	Black	6
7	Green	7
8	Brown	8
9	Red	9
L	Black and white	LDR (photocell) *

(*): for controllers CGE120X, CGE80 and CGE90